

Congratulations! You have just purchased one of the premium products from 3monkeez Scraptrap range, which has been manufactured to Australian Standards.

## SCOPE OF APPLICATION

SCRAP-S-90 (304 grade stainless steel)

Suits 90mm Outlet

SCRAP-S-90-316 (316 grade stainless steel)

SCRAP-S (304 grade stainless steel)

Suits 125mm Outlet

SCRAP-S316 (316 grade stainless steel)

## IMPORTANT INFORMATION



Note: Please follow the below procedures. If the below procedures are not followed it may impact the life of some components and void warranties.

- Scraptrap must be installed by a qualified plumber in accordance with the Plumbing Code of Australia (PCA), AS/NZS3500 and the Manufacturer's instructions
- Sink and pipework must be thoroughly flushed/cleaned to remove any debris prior to installation

## INSTALLATION INSTRUCTIONS

### Step 1

Unpack the Scraptrap, make sure all parts are included and no damage is present.

### Step 2

Make sure both top and bottom surfaces around the outlet of the sink are clean.

### Step 3

Remove the plug and basket from the body of the Scraptrap. Un-screw locking nut.

### Step 4

SCRAP-S-90 / SCRAP-S-90-316 - Apply a bead of silicone to the recess of the outlet and around the flange of the Scraptrap. Place body through 90mm sink outlet as shown in Fig 2.

SCRAP-S / SCRAP-S316 - Apply a bead of silicone to the recess of the outlet and around the flange of the Scraptrap. Place body through 125mm sink outlet as shown in Fig 2.

### Step 5

Ensure rubber seal is in place between locking nut and the bottom of the sink. Tighten locking nut until a water tight seal is achieved as shown in Fig3.

### Step 6

Connect 2" trap to AS/NZS 3500 Standard.

### Step 7

Place basket back inside body.

## EMPTY BASKET AND CLEAN REGULARLY

FIG1

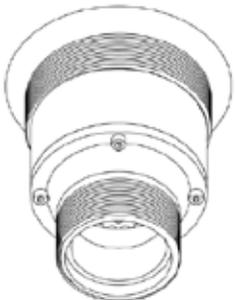


FIG2


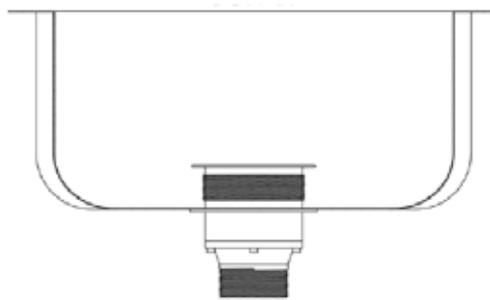


FIG3



## SCRAP-S-90 / SCRAP-S-90-316

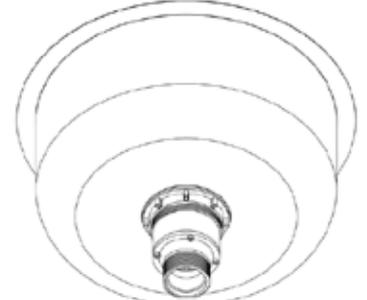

## SCRAP-S / SCRAP-S-316



### SPARE PARTS

- SCRAP-S-90-P-316 - Plug only to suit SCRAP-S-90 / SCRAP-S-90-316**
- SCRAP-S-90-B-316 - Basket only to suit SCRAP-S-90 / SCRAP-S-90-316**
- SCRAP-S-P-316 - Plug only to suit SCRAP-S / SCRAP-S316**
- SCRAP-S-B-316 - Basket only to suit SCRAP-S / SCRAP-S316**

### STAINLESS STEEL MAINTENANCE AND CLEANING INSTRUCTIONS

Stainless steel products must be cleaned on a regular basis to maintain the ability to resist corrosion. The surface of stainless steel has a protective layer that creates a protective shield against oxidation; which makes it durable and long lasting. Protecting this layer is important to ensure the longevity of this product.

Cleaning stainless steel products is an easy task when done regularly:

- Clear away all debris from the surface with a microfiber cloth or soft sponge; don't use abrasive materials as they have a negative impact on the protective layer.
- Once cleared of debris, go over the surface with a food safe stainless steel cleaner, bicarb soda or mild detergent and water. The best chemicals for stainless steel contain alkaline and don't have chloride in them.
- To remove stubborn stains, use a good quality stainless steel cleaner and non abrasive cloth.
- Rinse thoroughly with clean fresh water.
- Towel dry the product with a soft dry absorbent cloth after cleaning and use. This will prevent mineral deposits building up on the surface of the product.
- Once dry, use a food safe stainless steel or metal polish.
- Follow the grain of the metal to ensure the best results and to avoid further damage to the surface.
- Always keep the product clean and dry when not in use.
- Don't leave anything citric on the product as it can etch the surface over time.
- Don't leave soaps and other cleaners on your stainless steel product overnight.
- Don't leave damp sponges or cloths on the inside or edge of the product when not in use.

TIP - Cleaning your stainless steel equipment after each use as above will ensure the product remains in good condition.