

SCOPE OF APPLICATION

M-WC-SSCU90R-P
M-WC-SSCU90L-P

M-WC-SSCU45R-P
M-WC-SSCU45L-P

M-WC-SSCU90R-S
M-WC-SSCU90L-S

M-WC-SSCU45R-S
M-WC-SSCU45L-S

Features:

- Full 304 stainless steel construction
- Integrated hand basin
- Standard "P" trap waste connection
- "S" trap waste also available
- Ligature proof edge profiles
- Integrated toilet roll holder
- Concealed fixings
- WELS and Watermark approved
- Available with pan angled 90 deg, offset left or right.
- Also option of pan angled at 45 deg, left or right
- Anti-tamper access panels


IMPORTANT INFORMATION



Note: Please follow the below procedures. If the below procedures are not followed it may impact the life of some components and void warranties.

- Pan, waste and taps must be installed by a qualified plumber in accordance with the Plumbing Code of Australia (PCA), AS/NZS3500 and the Manufacturer's instructions
- All pipework must be thoroughly flushed to remove any debris prior to installation as foreign materials may cause damage to internal parts and affect performance
- If the unit is replacing an existing unit please ensure the water supply is turned off.

INSTALLATION INSTRUCTIONS

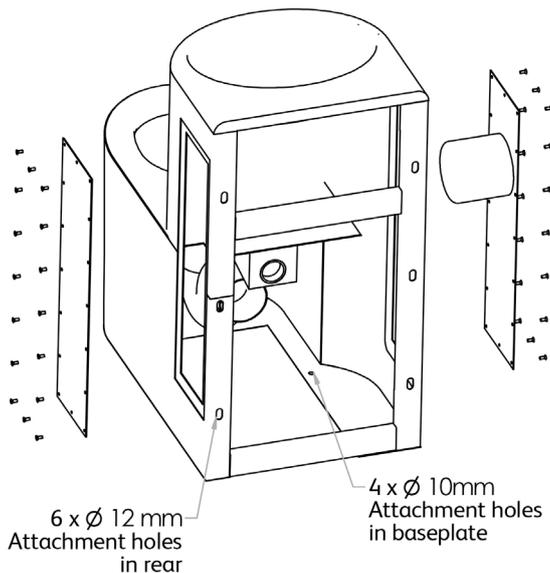

● Step 1

Remove the pan from all packaging. Fixing bolts may be in the carton or inside the pan.

● Step 2

Using the correct tool, remove the security screws and the side access panels. Do not attempt to remove the screws using a conventional screwdriver, allen key or pliers.

● Step 3

Place the pan in position on the floor, making certain it connects to the pan connector and flush pipe. Mark around the base of the pan and around the wall with a pencil or marking pen.

● Step 4

Through the access panels, mark the fixing point holes.

● Step 5

Move the pan and drill holes to suit the fixings supplied.

● Step 6

Fit tapware and basin waste. If you are not connecting to the water outlets at this stage, make sure you have adequate access once the pan is bolted in place

● Step 7

Using an approved silicone, apply a bead to the under edge of the pan base and back section. Alternately, apply to the floor and wall just inside the pencil mark.

● Step 8

Refit the pan, making certain it connects to the pan connector, flush pipe and basin waste. Insert fixing bolts and tighten to floor and wall.

● Step 9

Turn on the water supply and test for leaks.

● Step 10



Replace the access panels using only the recommended security screws as supplied.

● Step 11

Clean the pan using the recommended cleaning method. (see below)

TECHNICAL INFORMATION

Construction	Fully welded, 304 Stainless Steel
P Trap	100mm dia, 304 Stainless Steel
Kee Seal	Natural Rubber, suit 40mm flush pipe
Flush Volume	6 litre full flush / 3 litre half flush
Toilet Roll Holder	125mm Dia x 110 deep, 304 Stainless Steel
Finish	Satin Polish Stainless Steel

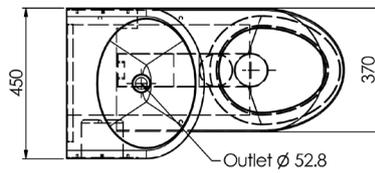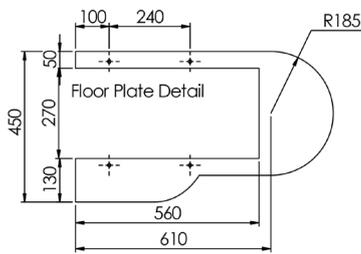


M-WC-SSCU90R-P
Combination unit - P trap. Straight with pan offset to the right.


M-WC-SSCU90L-P
Combination unit - P trap. Straight with pan offset to the left.

M-WC-SSCU90R-S
Combination unit - S trap. Straight with pan offset to the left.

M-WC-SSCU90L-S
Combination unit - S trap. Straight with pan offset to the left.

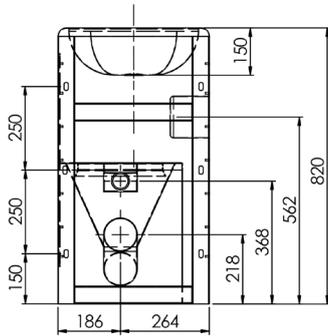

M-WC-SSCU90R-P Shown




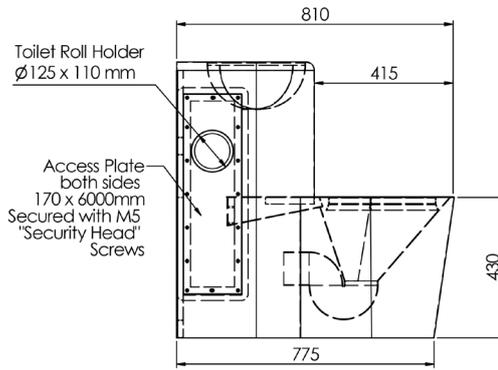


M-WC-SSCU45R-P
Combination unit - P trap. Angled 45 degree with pan offset to the right.

M-WC-SSCU45L-P
Combination unit - P trap. Angled 45 degree with pan offset to the left.

M-WC-SSCU45R-S
Combination unit - S trap. Angled 45 degree with pan offset to the right.

M-WC-SSCU45L-S
Combination unit - S trap. Angled 45 degree with pan offset to the left.

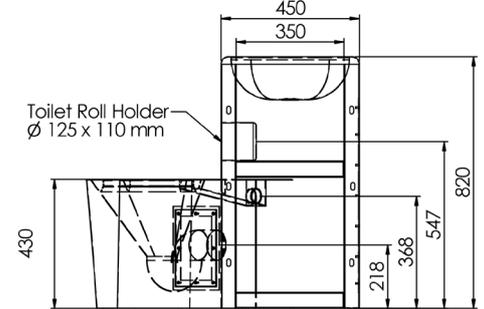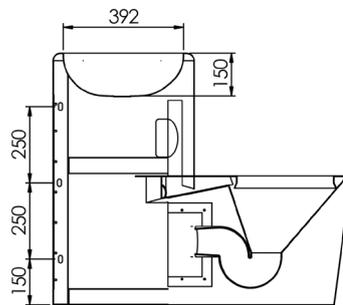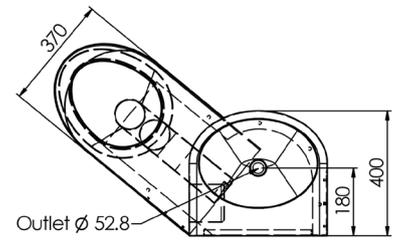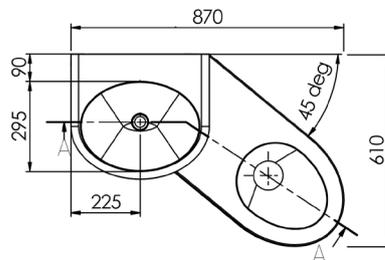

M-WC-SSCU45R-P Shown

STAINLESS STEEL MAINTENANCE AND CLEANING INSTRUCTIONS

Stainless steel products must be cleaned on a regular basis to maintain the ability to resist corrosion. The surface of stainless steel has a protective layer that creates a shield against oxidation, which makes it durable and long lasting. Protecting this layer is important to ensure the longevity of this product.

Cleaning stainless steel products is an easy task when done regularly:

- Clear away all deposits from the surface with a microfiber cloth or soft sponge; don't use abrasive materials as they have a negative impact on the protective layer.
- Once cleared of debris, go over the surface with a stainless steel cleaner, bicarb soda or mild detergent and water. The best chemicals for stainless steel contain alkaline and don't have chloride in them.
- To remove stubborn stains, use a good quality stainless steel cleaner and non abrasive cloth.
- Rinse thoroughly with clean fresh water.
- Towel dry the product with a soft dry absorbent cloth after cleaning and use. This will prevent mineral deposits building up on the surface of the product.
- Once dry, use a stainless steel or metal polish.
- Follow the grain of the metal to ensure the best results and to avoid further damage to the surface.
- Always keep the product clean and dry when not in use.
- Don't leave anything citric on the product as it can etch the surface over time.
- Don't leave soaps and other cleaners on your stainless steel product overnight.
- Don't leave damp sponges or cloths on the inside or edge of the product when not in use.