

# Accessories & Spare Parts



## Compact Pre-Rinse Sub Assembly with Pot Filler




**T-3M2928-06-C** – 6" pot filler

**T-3M2928-12-C** – 12" pot filler


- Full S/S construction
- $\frac{3}{8}$ " MI BSP riser thread
- Equipped with a water saving 6 star 4.5LPM variable trigger valve
- Available with 6" or 12" pot filler – 4 star 7.5LPM
- Fully assembled and bench tested, with a unique traceable serial number
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 80 degrees



Top



Side

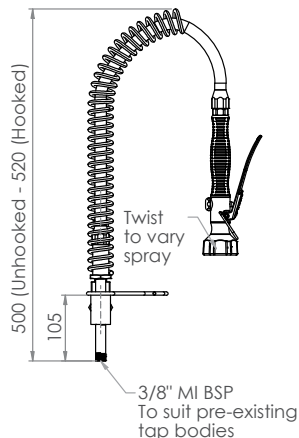

Front

