

Accessories & Spare Parts



CLEANAJET[®]
STAINLESS STEEL


Compact Pre-Rinse Sub Assembly

T-3M2928-C


- Full S/S construction
- 3/8" MI BSP riser thread
- Equipped with a water saving 6 star 4.5LPM variable trigger valve
- Fully assembled and bench tested, with a unique traceable serial number
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 80 degrees



Top



Side

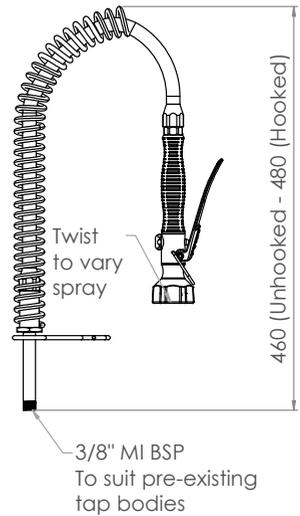

Front

