

Commercial Tapware



GUARDIAN TAPWARE®

Lever Handle Bib Tap



T-3MSS-BTML – Mechanical Operation-On/Off

T-3MSS-BT6L – 6 Second Timed Flow

T-3MSS-BT18L – 18 Second Timed Flow


T-3MSS-BTAL – Adjustable Timed Flow

- Full S/S construction
- ½" MI BSP
- ½" FI BSP extension piece included
- WELS 6 Star 3LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 60 degrees



Side

Front

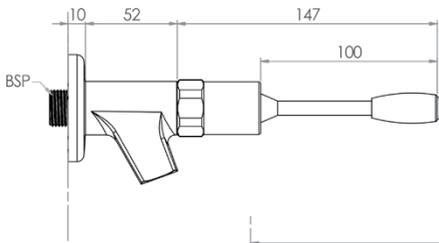

Without 73mm Extension

