

Congratulations! You have just purchased one of the premium products from 3monkeez commercial Scraptrap range.

SCOPE OF APPLICATION

SCRAPTRAP ONLY -	SCRAP-S-90	SCRAP-S-90-316	SCRAP-S	SCRAP-S316
SCRAPTRAP WITH SHUT OFF VALVE -	SCRAP-C-90	SCRAP-C-90-316	SCRAP-C	SCRAP-C-316
SHUT OFF VALVE ONLY -	SCRAP-V		SCRAP-V316	
SUPPORT BRACKET ONLY -	SCRAP-BRACKET-90		SCRAP-BRACKET-125	

IMPORTANT INFORMATION



Note: Please follow the below procedures. If the below procedures are not followed it may impact the life of some components and void warranties.

- Scraptraps and shut off valves must be installed by a qualified plumber in accordance with the Plumbing Code of Australia (PCA), AS/NZS3500 and the Manufacturer's instructions
- Sink and pipework must be thoroughly flushed/cleaned to remove any debris prior to installation
- The shut off valve should only be used in conjunction with the Cast S/S Scraptrap range. The weight of the shut off valve can break any plastic sink waste arrestor.
- Care should be taken to not hit or push against the shut off valve. Do not stand on the valve.
- This bracket is designed to provide support for the handle of the shut off valve when used in conjunction with the cast S/S Scraptrap

INSTALLATION INSTRUCTIONS

Step 1

Remove the plug, removable basket, retaining nut and rubber washers from the Scraptrap.

Step 2

Make sure both top and bottom surfaces around the outlet of the sink are clean. Apply a bead of silicone to the recess of the outlet and around the flange of the Scraptrap. Place Scraptrap body through sink outlet.

Step 3

Install the thick rubber washer to the underside of the Scraptrap. Install the support bracket (if purchased) to the underside of the Scraptrap. Loosely install the retaining nut to the underside of the Scraptrap. Do not tighten yet if also installing a shut off valve.
If installing Scraptrap only - Fully tighten retaining nut, then connect 2" trap to AS/NZS 3500 Standard. Place removable basket back in unit.

Step 4

If shut off valve purchased - Install the shut off valve by turning the Scraptrap body in to the thread. There is a rubber sealing ring in the body of the shut off valve though it may be necessary to apply a sealing tape to the thread of the Scraptrap to achieve a watertight seal.

Step 5

Place the shaft of the shut off valve in to the hook of the support bracket (if purchased).

Step 6

Fully tighten the retaining nut of the Scraptrap. Connect 2" trap to AS/NZS 3500 Standard. Place removable basket back in unit. Test for leaks.

RETROFIT - To retrofit support bracket and/or shut off valve.

Step 1

Disconnect 2" trap. Clean off Scraptrap.

Step 2

For support bracket - Remove retaining nut, taking care to not break the seal on the sink. Install support bracket on Scraptrap, then loosely install the retaining nut to the underside of the Scraptrap. Do not tighten yet.

Step 3

For shut off valve - Undo the 4 screws that hold the main body together. Install the top part of the main body. There is a rubber sealing ring in the body of the shut off valve though it may be necessary to apply a sealing tape to the thread of the Scraptrap to achieve a watertight seal. Re assemble the shut off valve, ensuring the large silicone seal seats will inside body sections of the main body. Re install the 4 screws, lightly tighten all before fully tightening all. Do not overtighten.
If there is ample space underneath the sink to fully rotate the assembled shut off valve for installation, it will not need to be disassembled. Adjust positioning of shut off valve if required.

Step 3





Place shaft of shut off valve on the bracket hook (if purchased). Fully tighten the retaining nut of the Scraptrap.

Step 4

Connect 2" trap to AS/NZS 3500 Standard. Test for leaks.



CARTON CONTENTS - 1x Scraptrap - Including Removable Basket and Plug (if purchased), 1x Shut Off Valve (if purchased), 1x Shut Off Valve Support Bracket (if purchased), 1x Installation Instructions

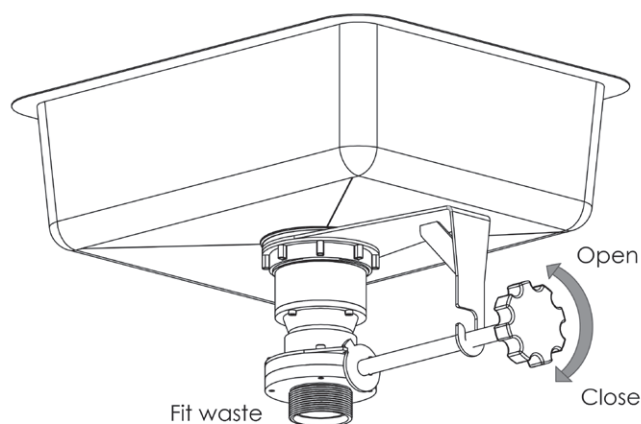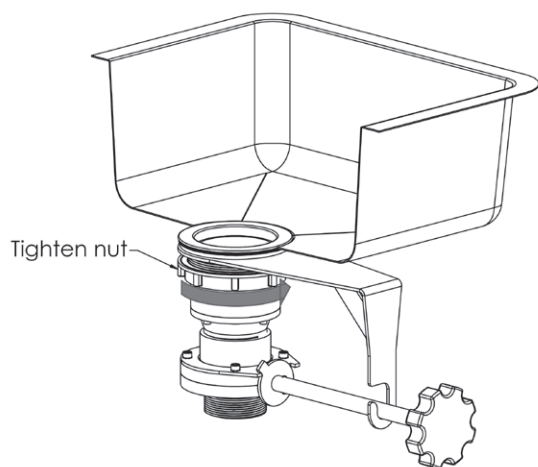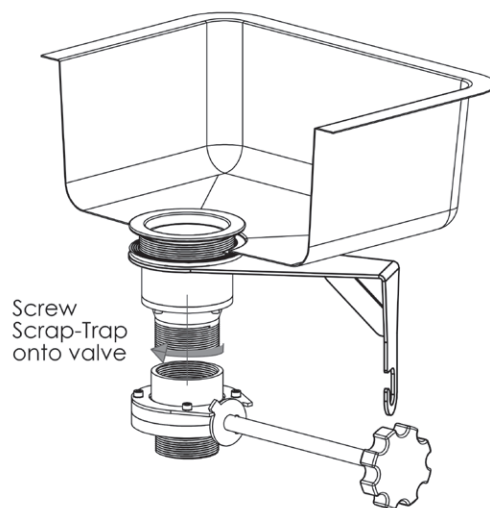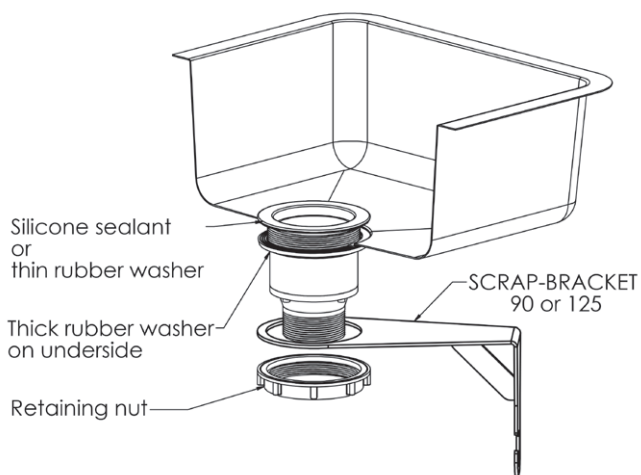

STAINLESS STEEL MAINTENANCE AND CLEANING INSTRUCTIONS

Stainless steel products must be cleaned on a regular basis to maintain the ability to resist corrosion. The surface of stainless steel has a protective layer that creates a protective shield against oxidation; which makes it durable and long lasting. Protecting this layer is important to ensure the longevity of this product.

Cleaning stainless steel products is an easy task when done regularly:

- Clear away all debris from the surface with a microfiber cloth or soft sponge; don't use abrasive materials.
- Once cleared of debris, go over the surface with a food safe stainless steel cleaner, bicarb soda or mild detergent and water. The best chemicals for stainless steel contain alkaline and don't have chloride in them.
- To remove stubborn stains, use a good quality stainless steel cleaner and non abrasive cloth.
- Rinse thoroughly with clean fresh water.
- Towel dry the product with a soft dry absorbent cloth after cleaning and use.
- Once dry, use a food safe stainless steel or metal polish. Follow the grain of the metal to ensure the best results and avoid damage.
- Always keep the product clean and dry when not in use.
- Don't leave anything citric on the product as it can etch the surface over time.
- Don't leave soaps and other cleaners on your stainless steel product overnight or damp sponges/cloths on of the product when not in use.

TIP - Cleaning your stainless steel equipment after each use as above will ensure the product remains in good condition.